


HY 038



12
Volt

24
Volt

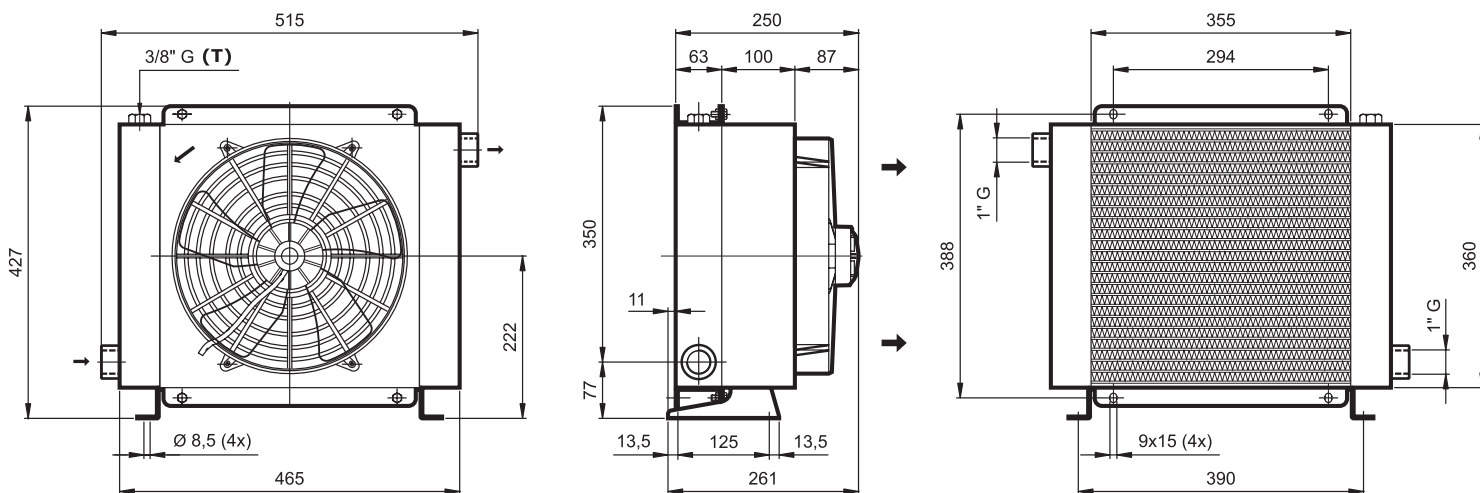

Dati Tecnici / Technical information / Technische Daten

Tipo Type Typ	Portata olio Oil flow Öldurchfluß	Capacità Capacity Kapazität	Peso Weight Gewicht	Voltaggio Voltage Spannung	Assorbimento Current Stromaufnahme	Potenza Power Motorleistung	Ø ventola Fan Ø Lüfterrad Ø	Portata aria Air flow Luftdurchsatz	Rumorosità Noise Level Geräuschpegel
	l/1'	l	kg	V	A	W	mm	m ³ /h	dB(A)
HY03802	40 - 160	4,8	18,5	12	17,6	211	305	1830	72
HY03804	40 - 160	4,8	18,5	24	7,6	182	305	1960	72

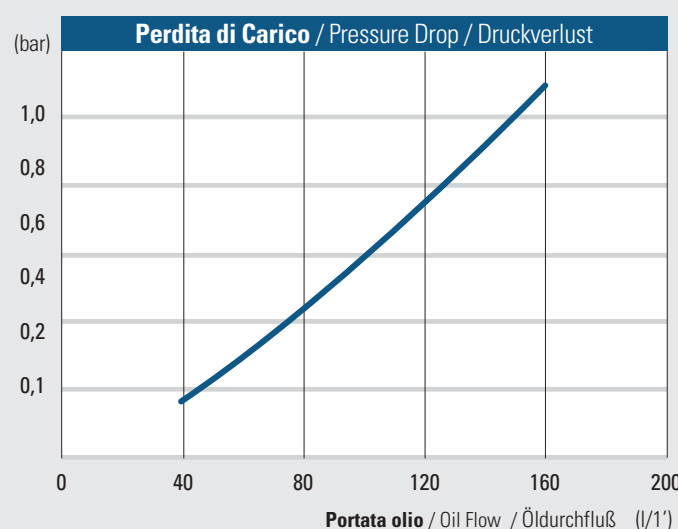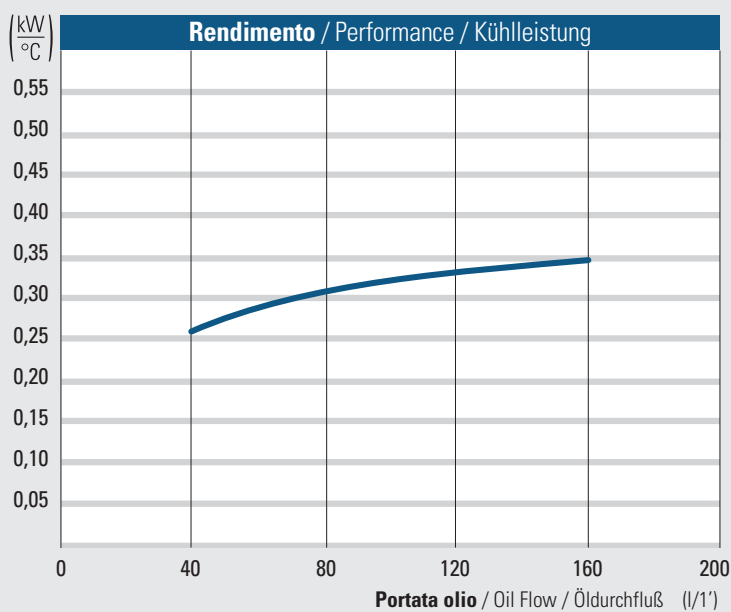

Correzione viscosità - Viscosity correction - Viskositätskorrektur

Olio - Oil - Öl: **ISO VG @ 40 °C** 22 32 **46** 68 150
 Moltiplicare per - Multiply for - Multiplizieren mit: 0,7 0,9 **1** 1,1 2

1 kW = 860 Kcal/h - 1 kW = 635 HP